

Spectral integration of linear boundary value problems

Divakar Viswanath

Department of Mathematics, University of Michigan (divakar@umich.edu).

Abstract

Spectral integration is a method for solving linear boundary value problems which uses the Chebyshev series representation of functions to avoid the numerical discretization of derivatives. It is occasionally attributed to Zebib (*J. of Computational Physics* vol. 53 (1984), p. 443-455) and more often to Greengard (*SIAM J. on Numerical Analysis* vol. 28 (1991), p. 1071-1080). Its advantage is believed to be its relative immunity to errors that arise when nearby grid points are used to approximate derivatives. In this paper, we reformulate the method of spectral integration by changing it in four different ways. The changes consist of a more convenient integral formulation, a different way to treat and interpret boundary conditions, treatment of higher order problems in factored form, and the use of piecewise Chebyshev grid points. Our formulation of spectral integration is more flexible and powerful as show by its ability to solve a problem that would otherwise take 8192 grid points using only 96 grid points. Some of the intermediate quantities have large errors which cancel in the final result. The matrices that arise will have large condition numbers if the solution develops thin boundary layers. However, spectral integration is accurate in spite of the ill-conditioning of those matrices.

1 Introduction

In this introduction, we begin by describing the method of spectral integration as it is ordinarily understood followed by the four modifications and enhancements we make to the method. For expository convenience, we consider the second order boundary value problem

$$D^2u + bDu + cu = f, \quad u(\pm 1) = 0 \quad (1.1)$$

where $D = \frac{d}{dy}$, $f(y)$ is known over the interval $-1 \leq y \leq 1$, and $u(y)$, $-1 \leq y \leq 1$, is the solution to be determined. The coefficients b and c are constant scalars. The solution to this problem can develop boundary layers. For example, when $b = 0$ and c is a large negative number, the width of the boundary layer at $y = \pm 1$ is typically and approximately $(-c)^{-1/2}$.

The method of spectral integration as described by Zebib [16, 1984] and Greengard [4, 1991] begins by expanding D^2u in a truncated Chebyshev series of the form

$$\frac{\alpha_0 T_0(y)}{2} + \sum_{j=1}^{M-1} \alpha_j T_j(y) + \frac{\alpha_M T_M(y)}{2}. \quad (1.2)$$

The Chebyshev polynomial $T_j(y)$ is defined for $-1 \leq y \leq 1$ as $\cos j\theta$ if $\cos \theta = y$ and $0 \leq \theta \leq \pi$. The $M+1$ Chebyshev grid points are $\cos(j\pi/M)$, $j = 0, \dots, M$. The discrete cosine transform

is an efficient method for passing back and forth between function values at Chebyshev grid points and the Chebyshev coefficients. For convenience, we use the notation $\mathcal{T}_j(f)$ for the j -th coefficient in the truncated Chebyshev series of f . Using this notation, we may write $\alpha_j = \mathcal{T}_j(D^2u)$. In implementation, it is often convenient to set $\alpha_M = 0$.

The indefinite integral of $T_n(y)$ is

$$\int T_n = \frac{T_{n+1}}{2(n+1)} - \frac{T_{n-1}}{2(n-1)} \quad \text{if } n > 1, \quad (1.3)$$

$T_2/4$ if $n = 1$, and T_1 if $n = 0$. Likewise, the indefinite integral iterated twice is

$$\int \int T_n = \frac{T_{n+2}}{4(n+1)(n+2)} - \frac{T_n}{2(n^2-1)} + \frac{T_{n-2}}{4(n-1)(n-2)} \quad \text{if } n > 2, \quad (1.4)$$

$T_2/4$ if $n = 0$, $T_3/24$ if $n = 1$, and $T_4/48 - T_2/6$ if $n = 2$. The Chebyshev series of $D^2u + bDu + cu$ is obtained using the series (1.2) of D^2u and the indefinite integrals (1.3) and (1.4). The series of $D^2u + bDu + cu$ is in terms of the coefficients α_j which appear in (1.2) and will have a term of the form $A + By$ corresponding to constants of integration. If the truncated Chebyshev series of f is set equal to the Chebyshev series of $D^2u + bDu + cu$, we get $M + 1$ equations for the $M + 3$ unknowns $\alpha_0, \dots, \alpha_M$, A , and B . This set of $M + 1$ equations is banded. The boundary conditions give two more equations [4]:

$$\begin{aligned} A + B + \sum_{j=2}^M \left(\frac{a'_{j-2}}{4j(j-1)} - \frac{a'_j}{2(j^2-1)} + \frac{a'_{j+2}}{4j(j+1)} \right) &= 0 \\ A - B + \sum_{j=2}^M \left(\frac{a'_{j-2}}{4j(j-1)} - \frac{a'_j}{2(j^2-1)} + \frac{a'_{j+2}}{4j(j+1)} \right) (-1)^j &= 0 \end{aligned} \quad (1.5)$$

where $a'_j = \alpha_j$ for $j = 0, \dots, M-1$, $a'_M = \alpha_M/2$, and $a'_{M+1} = a'_{M+2} = 0$. After these two equations are inserted, we have $M + 3$ equations for $M + 3$ unknowns but the system is no longer banded. This completes our description of the method of Zebib [16] and Greengard [4].

The first change we make to the method is as follows. The method of Zebib and Greengard begins with the Chebyshev series of D^2u . Instead, we begin by integrating the differential equation (1.1) to get

$$u + b \int u + c \int \int u + A + By = \int \int f \quad u(\pm 1) = 0. \quad (1.6)$$

Here the integrals are understood to be indefinite integrals. If we expand u as a Chebyshev series of the form (1.2), instead of expanding D^2u as in the method of Zebib and Greengard, we may again use standard formulas to calculate the coefficients in the Chebyshev series of the left and right hand sides of (1.6) and then equate them. The boundary conditions now take on the form

$$\frac{\alpha_0}{2} + \sum_{j=1}^{M-1} \alpha_j + \frac{\alpha_M}{2} = \frac{\alpha_0}{2} + \sum_{j=1}^{M-1} (-1)^j \alpha_j + (-1)^M \frac{\alpha_M}{2} = 0. \quad (1.7)$$

As before, the resulting matrix system is banded except for the boundary rows, which are dense. The matrix system that results was presented on page 119 of Gottlieb and Orszag [3,

1977]. Gottlieb and Orszag noted that the matrix system was “essentially diagonally dominant” and therefore well conditioned, neither of which is in fact true if the solution develops thin boundary layers, but did not explain how they derived it. However, the method has been used extensively in fluid mechanics for decades [6, 7]. Muir [9] has recognized that the matrix system of Gottlieb and Orszag is obtained if differentiation matrices are used to discretize (1.1) and the resulting discretization is multiplied by an integration preconditioner of the type discussed by Coutsias et al. [1]. It is advantageous to begin by reformulating the boundary value problem in the integral form (1.6) for developing other aspects of spectral integration.

The second change we introduce improves the way boundary conditions are handled and brings to light a numerical property of spectral integration which a good implementation must have. In integral form, the boundary value problem is

$$u + b \int u + c \int \int u + A + By = \int \int f. \quad (1.8)$$

If the boundary conditions $u(\pm 1) = 0$ are used directly the matrix system loses its banded structure. Instead we find a particular solution of (1.8) with the global conditions

$$\mathcal{T}_0(u) = \mathcal{T}_1(u) = 0.$$

These conditions are global because the first two Chebyshev coefficients $\mathcal{T}_0$ and $\mathcal{T}_1$ are defined by integrating over the entire domain as in $\int_{-1}^1 u(y)(1-y^2)^{-1/2} dy$ and $\int_{-1}^1 y u(y)(1-y^2)^{-1/2} dy$, respectively. The advantage is that these integral conditions lead to a banded system. Two homogeneous solutions are found by solving

$$u + b \int u + c \int \int u + A + By = 0$$

subject to the global conditions

$$\mathcal{T}_0(u) = 1, \mathcal{T}_1(u) = 0 \quad \text{and} \quad \mathcal{T}_0(u) = 1, \mathcal{T}_1(u) = 0,$$

respectively. Each homogeneous solution is found by solving a banded system. The boundary conditions $u(\pm 1) = 0$ are enforced by adding an appropriate linear combination of the two homogeneous solutions to the particular solution.

It may seem that two homogeneous solutions can be found much more easily using the roots of the characteristic equation of $\lambda^2 + b\lambda + c = 0$. While finding homogeneous solutions using the characteristic roots is easy, doing so will ruin the accuracy of the method. Typically the particular solution of (1.8) satisfying the global or integral conditions $\mathcal{T}_0(u) = \mathcal{T}_1(u) = 0$ will have a Chebyshev series that converges much more slowly than the particular solution which satisfies boundary conditions such as $u(\pm 1) = 0$. If the homogeneous solutions are found using the characteristic roots, one has to use enough grid points to resolve the particular solution satisfying the global conditions $\mathcal{T}_0(u) = \mathcal{T}_1(u) = 0$. On the other hand, if the homogeneous solutions are found as indicated, the grid need only resolve the solution that satisfies the given boundary conditions. We show in Section 4, that errors in the particular solution and homogeneous solutions found using global or integral conditions cancel each other when those solutions are combined to find a solution u that satisfies $u(\pm 1) = 0$ (or some other boundary conditions of that type).

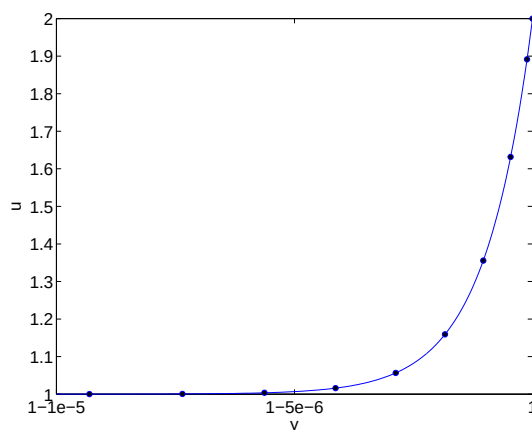


Fig. 1.1: Solution of $(D^2 - aD)u = 0$ with $a = 10^6$ and $u(1) = 2$ and $u(-1) = 1$. The figure shows the very thin boundary layer near $y = 1$. The computed solution (solid line) is in excellent agreement with the exact solution (filled markers).

The third change we make is to tackle higher order problems by factorizing the operator. If a linear boundary value problem can be written in the form $(D - a_1)(D - a_2)(D^2 + b_1D + c_1)u = f$, for example, the method we describe in Section 3 tackles the boundary value problem by considering the operators $(D - a_1)$, $(D - a_2)$, and $(D^2 + b_1D + c_1)$ separately. This modification eases the burden of implementation greatly. In principle, the generalization of the method of spectral integration to higher order problems is not difficult as we show in Section 2. However, the implementation becomes laborious. The factored version of spectral integration is described in Section 3. The idea of factorizing operators occurs in the work of Kim, Moin, and Moser [6], a landmark in the modern development of fluid mechanics, in a special form. It is used in a more implicit way in the earlier and equally important work of Kleiser and Schumann [7].

The fourth change, which is described in Section 7, is perhaps the most significant of all. In Section 7, the factored form of spectral integration is generalized to piecewise Chebyshev grids. Figure 1.1 shows a solution with a thin boundary layer. It takes 8192 grid points to compute the solution with 10 or more digits of accuracy using any of the usual forms of spectral integration. Spectral integration with piecewise Chebyshev grid points reaches 10 or more digits of accuracy using only 96 points.

The example used in Figure 1.1 is taken from an important paper by Greengard and Rokhlin [5] (also see Starr and Rokhlin [12]). In that paper, Greengard and Rokhlin show how to make numerical methods based on Green's functions work for problems with non-constant coefficients. For a boundary value problem of the form $u'' + p(y)u' + q(y)u = f(y)$ with boundary conditions at $y = a$ and $y = c$, Greengard and Rokhlin split the interval $[a, c]$ into subintervals each of which is discretized using Chebyshev points. The solution u is represented using a background Green's function. The method of Greengard, Rokhlin, and Starr appears to be the best general purpose method for solving linear boundary value problems in one spatial dimension. It can handle non-constant coefficients, boundary layers, and rapid oscillations. Spectral integration with piecewise Chebyshev grid described in Section 7 requires the coefficients to be constant, but is much cheaper when coefficients are in fact constant, as they are in many applications. In particular, spectral integration with piecewise Chebyshev

grid is likely to be of much importance for high Reynolds number channel and Couette flow [15].

When the boundary value problem admits thin boundary layers, the matrices that arise in spectral integration are very ill-conditioned. However, when the width of the boundary layer is 10^{-6} and the condition number is as high as 10^{24} , only six digits of accuracy are lost. We investigate this partial immunity to poor condition numbers in Section 5.

The numerical examples in Section 6 illustrate three properties of spectral integration: ability to resolve boundary layers, impressive accuracy even when the matrices that arise are ill-conditioned, and robustness when the solution is highly over-resolved.

In addition to the generalization of spectral integration to piecewise Chebyshev grids, Section 7 derives a method for solving boundary value problems using piecewise Chebyshev grids and differentiation matrices. Spectral methods are much easier to implement when differentiation matrices are used explicitly. The disadvantages of using differentiation matrices are high cost, the number of arithmetic operations being cubic in the number of grid points as opposed to the linear cost of spectral integration, and large rounding errors when the number of grid points is increased. However, the use of piecewise Chebyshev grids appears to eliminate the need for a Chebyshev grid with a lot of points in many if not most problems. In Section 7, we show that spectral differentiation matrices are effective for solving problems with boundary layers and internal layers. The cost remains higher than that of spectral integration but the rounding errors are no longer a problem.

2 Spectral integration of boundary value problems

Section 2.1 describes spectral integration of first and second order linear boundary value problems. The factored form of spectral integration described in Section 3 reduces higher order boundary value problems to such first and second order problems. Section 2.2 describes r -th order spectral integration, which tackles r -th order problems directly, and Section 2.3 is a reformulation of the method of Zebib and Greengard. Both r -th order spectral integration and our formulation of Zebib-Greengard work with banded matrices only. In Section 4, an important cancellation property of spectral integration will emerge from the explicit manner in which the linear systems are set up here.

In this section, the interval of the boundary value problem is taken to be $-1 \leq y \leq 1$ and the solution u is expanded as follows:

$$u(y) = \frac{\alpha_0}{2} + \alpha_1 T_1 + \cdots + \alpha_{M-1} T_{M-1} + 0 \cdot T_M. \quad (2.1)$$

The Chebyshev points $y_j = \cos(j\pi/M)$ with $j = 0 \dots M$ are $M + 1$ in number including the endpoints ± 1 , but the last coefficient in the Chebyshev series is always suppressed as indicated above.

In each of the methods of this section and in the factored form of spectral integration described in the next section, the way the homogeneous solutions are computed may appear roundabout. As explained in Section 4, such a roundabout calculation is essential for ensuring accuracy.

2.1 First and second order spectral integration

Suppose a first order boundary value problem is given in the form

$$(D - a)u = f. \quad (2.2)$$

The exact boundary condition is unimportant for much of the method. To begin with we assume the integral condition $\mathcal{T}_0(u) = 0$ or equivalently $\alpha_0 = 0$. Suppose that the Chebyshev coefficients of f are given by $f_j = \mathcal{T}_j(f)$.

The indefinite integral of (2.2) gives

$$u - a \int u + A = \int f, \quad (2.3)$$

where A is an undetermined constant. By (1.3), the coefficient of T_n on the right hand side is

$$\mathcal{T}_n \left(\int f \right) = \frac{f_{n-1} - f_{n+1}}{2n} \quad \text{for } n = 1, 2, \dots, M-1.$$

The $n = M-1$ case assumes $f_M = 0$. Using (1.3) once again, the coefficient of T_n in the expansion of the left hand side of (2.3) is

$$\mathcal{T}_n \left(u - a \int u + A \right) = \begin{cases} \alpha_n - a \left(\frac{\alpha_{n-1} - \alpha_{n+1}}{2n} \right) & 2 \leq n \leq M-2 \\ \alpha_n - a \left(\frac{-\alpha_{n+1}}{2n} \right) & n = 1 \\ \alpha_n - a \left(\frac{\alpha_{n-1}}{2n} \right) & n = M-1 \end{cases}$$

for $n = 1, \dots, M-1$. The coefficients with $n = 1$ and $n = M-1$ are obtained from the more general expression $\alpha_n - a(\alpha_{n-1} - \alpha_{n+1})/2n$ by setting $\alpha_0 = 0$ and $\alpha_{M-1} = 0$, respectively. Equating coefficients for $n = 1, \dots, M-1$ we have $M-1$ equations for the $M-1$ unknowns $\alpha_1, \dots, \alpha_{M-1}$. This tridiagonal linear system is solved to compute a particular solution u^p satisfying $(D - a)u^p = f$ and the integral condition $\mathcal{T}_0(u^p) = 0$.

A homogeneous solution $\bar{u}^1$ satisfying $(D - a)\bar{u}^1 = 0$ and $\mathcal{T}_0(\bar{u}^1) = 1$ is found as follows. We set $\bar{u} = 1/2 + u^*$ so that u^* satisfies $\mathcal{T}_0(u^*) = 0$ and $(D - a)u^* = a/2$. Thus u^* is the particular solution of (2.2) satisfying $\mathcal{T}_0(u^*) = 0$ if $f \equiv -a/2$ and it may be found using the method described for computing particular solutions. The same linear tridiagonal system is solved for computing u^* and u^p but with different right hand sides.

The solution u is expressed as $u^p + C\bar{u}^1$ and the constant C is found using the boundary condition on u .

Now we consider the second order problem

$$(D^2 + bD + c)u = f. \quad (2.4)$$

Integrating twice, we have

$$u + b \int u + c \int \int u + A + By = \int \int f.$$

To find a particular solution, we assume the integral conditions $\mathcal{T}_0(u) = \mathcal{T}_1(u) = 0$ or equivalently $\alpha_0 = \alpha_1 = 0$. By (1.4), the coefficient of T_n of the right hand side is

$$\mathcal{T}_n \left(\int \int f \right) = \frac{f_{n-2}}{4n(n-1)} - \frac{f_n}{2(n^2-1)} + \frac{f_{n+2}}{4n(n+1)}$$

for $n = 2, \dots, M-1$ (here $f_M = f_{M+1} = 0$ is assumed). The coefficient of the left hand side is

$$\begin{aligned} \mathcal{T}_n \left(u + b \int u + c \int \int u + A + By \right) &= \alpha_{n-2} \left(\frac{b}{4n(n-1)} \right) + \alpha_{n-1} \left(\frac{a}{2n} \right) \\ &+ \alpha_n \left(1 - \frac{b}{2(n^2-1)} \right) + \alpha_{n+1} \left(\frac{-a}{2n} \right) + \alpha_{n+2} \left(\frac{b}{4n(n+1)} \right) \end{aligned}$$

for $n = 2, \dots, M-1$. The validity of the equations for $n = 2, 3$ relies on the boundary conditions $\alpha_1 = \alpha_2 = 0$. The equations for $n = M-2, M-1$ assume $\alpha_M = \alpha_{M+1} = 0$. The coefficients for $n = 2, \dots, M-1$ on the left and right hand sides are equated to solve for the unknowns $\alpha_2, \dots, \alpha_{M-1}$. The particular solution u^p obtained in this manner satisfies $(D^2 + bD + c)u^p = f$ and the integral conditions $\mathcal{T}_0(u^p) = \mathcal{T}_1(u^p) = 0$.

The first homogenous solution satisfies $(D^2 + bD + c)\bar{u}^1 = 0$ and the integral conditions $\mathcal{T}_0(\bar{u}^1) = 1, \mathcal{T}_1(\bar{u}^1) = 0$. To find it, we set $\bar{u}^1 = 1/2 + u^*$. Then u^* satisfies the inhomogeneous equation (2.4) with $f \equiv -c/2$ and the integral conditions $\mathcal{T}_0(u^*) = \mathcal{T}_1(u^*) = 0$. The solution u^* is computed using the same pentadiagonal system used for u^p but with a different right hand side.

The second homogenous solution $\bar{u}^2$ satisfies the integral conditions $\mathcal{T}_0(\bar{u}^2) = 0, \mathcal{T}_1(\bar{u}^2) = 1$. If we set $\bar{u}^2 = T_1 + u^*$, u^* satisfies the inhomogeneous equation with $f \equiv -(b + cT_1)$. It is found by solving the same pentadiagonal system.

The solution u of (2.4) is expressed as $u^p + C\bar{u}^1 + D\bar{u}^2$ and the constants C and D are determined using the boundary conditions on u .

2.2 Spectral integration of r -th order

Define the operator L as $Lu = u^{(r)} + a_{r-1}u^{(r-1)} + \dots + a_1u^{(1)} + a_0u$. Consider the inhomogeneous equation $Lu = f$. A particular solution satisfying the integral conditions

$$\mathcal{T}_0(u) = \dots = \mathcal{T}_{r-1}(u) = 0$$

or equivalently $\alpha_0 = \dots = \alpha_{r-1} = 0$ may be found as follows. The inhomogeneous equation is written in an integral form as

$$u + a_{r-1} \int u + \dots + a_0 \int^r u + \sum_{j=0}^{r-1} A_j y^j = \int^r f.$$

Using formulas for $\int^j T_n$ analogous to (1.3) and (1.4), we may express the coefficients of $T_r, \dots, T_{M-1}$ in terms of $\alpha_r, \dots, \alpha_{M-1}$. These coefficients are equated to the coefficients of $\int^r f$ and solved for $\alpha_r, \dots, \alpha_{M-1}$ to find the particular solution u^p . The linear system has $2r + 1$ diagonals.

To find the j -th homogeneous solution for $j = 1, \dots, r$, we first set $\bar{u}^j = T_{j-1} + u^*$. The j -th homogenous solution satisfies the conditions $\mathcal{T}_k(\bar{u}^j) = 0$, if $0 \leq k \leq r-1$ and $k \neq j-1$, and $\mathcal{T}_{j-1}(\bar{u}^j) = 1$. The function u^* satisfies $Lu^* = -LT_{j-1}$ and the first r coefficients in its Chebyshev series are zero. It can be found in the same manner as the particular solution.

The solution of the linear boundary value problem is expressed as $u^p + \sum_{j=1}^r C_j \bar{u}^j$. The boundary conditions satisfied by u are used to determine the constants C_j .

Formulas for $\int^j T_n$ can be derived but get complicated. The $2r + 1$ diagonal system can be difficult to set up correctly in programs. For the difficulties that arise for $r = 4$, see [9]. Spectral integration of r -th order will, however, prove quite useful in the discussion of cancellation errors in Section 4.

2.3 Zebib-Greengard form of spectral integration

The formulation of the Zebib-Greengard form of spectral integration given here makes it clear that the matrix systems solved have $2r + 1$ diagonals if the problem is of order r . We assume L to be the operator defined in Section 2.2 above.

The Zebib-Greengard form begins by assuming a Chebyshev series for $u^{(r)}$. We first find a particular solution of $Lu = f$ subject to the integral conditions

$$\mathcal{T}_0(u) = \mathcal{T}_0(u^{(1)}) = \dots = \mathcal{T}_0(u^{(r-1)}) = 0.$$

When these conditions are used, the Chebyshev series of $u^{(s)}$ determines the Chebyshev series of $u^{(s-1)}$ for $s = r, \dots, 1$ with no ambiguity. Normally, there is an undetermined constant of integration when the series of $u^{(s)}$ is integrated. But here the constant disappears because the mean mode of $u^{(s-1)}$ is specified to be zero. Thus the Chebyshev series of Lu is determined unambiguously by the Chebyshev series of $u^{(r)}$. Coefficients in the Chebyshev series of Lu and f are equated and solved for $\mathcal{T}_j(u^{(r)})$ for $j = 0, \dots, M$.

To find homogeneous solutions $\bar{u}$, we expand $\bar{u}^{(r)}$ in a Chebyshev series and take the integral conditions to be such that exactly one of $\mathcal{T}_0(\bar{u}), \dots, \mathcal{T}_0(\bar{u}^{(r-1)})$ is one and the others are all zero. It is harder to find homogeneous solutions here than in the r -th order spectral integration method described in Section 2.2. One has to find polynomials p_k of degree k for $k = 0, 1, \dots, r - 1$ such that $\mathcal{T}_0(p_k^{(k)}) = 1$ but $\mathcal{T}_k(p_k^{(d)}) = 0$ for $d = 0, \dots, k - 1$.

This form of spectral integration has been derived in greater generality, allowing for linear operators with polynomial coefficients, in [1, Section 3].

3 Spectral integration in factored form

A linear operator L with constant and real coefficients can be factorized as

$$L = (D - a_1) \dots (D - a_m)(D^2 + b_1D + c_1) \dots (D^2 + b_nD + c_n)$$

where the coefficients are all real. We assume $m + n \geq 2$ and derive a method for solving $Lu = f$ subject to boundary conditions that exploits this factorization of L . This method relies on spectral integration of orders one and two described in Section 2.1. The presentation of the method may appear more complicated but its implementation is much simpler than the methods of Sections 2.2 and 2.3. In addition, the factored form of spectral integration lends itself to piecewise Chebyshev grids as shown in Section 7.

A particular solution is found by solving the following equations subject to integral condi-

tions on their solutions:

$$\begin{aligned}
(D - a_1)u_{m+2n-1}^p &= f & \mathcal{T}_0(u_{m+2n-1}^p) &= 0 \\
(D - a_2)u_{m+2n-2}^p &= u_{m+2n-1}^p & \mathcal{T}_0(u_{m+2n-2}^p) &= 0 \\
&\vdots & & \\
(D - a_m)u_{2n}^p &= u_{2n+1}^p & \mathcal{T}_0(u_{2n}^p) &= 0 \\
(D^2 + b_1D + c_1)u_{2n-2}^p &= u_{2n}^p & \mathcal{T}_0(u_{2n-2}^p) &= \mathcal{T}_1(u_{2n-2}^p) = 0 \\
&\vdots & & \\
(D^2 + b_nD + c_n)u_0^p &= u_2^p & \mathcal{T}_0(u_0^p) &= \mathcal{T}_1(u_0^p) = 0.
\end{aligned}$$

This list of equations is solved from first to last. Each equation is solved using one of the two methods described in Section 2.1. The subscripts on u , as in u_{2n}^p , indicate the number of “derivatives” in the function relative to u_0^p which satisfies $Lu_0^p = f$ and is therefore a particular solution.

If $m \geq 1$, the homogeneous solution $\bar{u}^h$ with $h = 1$ is found as follows. To begin with we solve the homogeneous problem

$$(D - a_1)\bar{u}_{n+2m-1}^h = 0 \quad \mathcal{T}_0(\bar{u}_{n+2m-1}^h) = 1$$

as described in Section 2.1. Thereafter, the inhomogeneous problems

$$(D - a_j)\bar{u}_{n+2m-j}^h = \bar{u}_{n+2m-j+1}^h \quad \mathcal{T}_0(\bar{u}_{n+2m-j}^h) = 0 \quad (3.1)$$

are solved in the order $j = 2, \dots, m$ followed by the solution of

$$(D^2 + b_kD + c_k)\bar{u}_{2n-2k}^h = \bar{u}_{2n-2k+2}^h \quad \mathcal{T}_0(\bar{u}_{2n-2k}^h) = \mathcal{T}_1(\bar{u}_{2n-2k}^h) = 0 \quad (3.2)$$

in the order $k = 1, \dots, n$. The last solution to be found is $\bar{u}^h = \bar{u}_0^h$ and it satisfies $L\bar{u}^h = 0$. The inhomogeneous equations (3.1) and (3.2) are solved as described in Section 2.1.

More generally, the homogeneous solution $\bar{u}^h$ with $1 \leq h \leq m$ is solved beginning with the homogeneous problem

$$(D^2 - a_h)\bar{u}_{m+2n-h}^h = 0 \quad \mathcal{T}_0(\bar{u}_{m+2n-h}^h) = 1$$

followed by the solution of (3.1) with $j = h + 1, \dots, m$ and (3.2) with $k = 1, \dots, n$. As before, $\bar{u}_0^h$ is the last solution to be found and $\bar{u}^h = \bar{u}_0^h$.

If $h = m + 2i - 1$ with $1 \leq i \leq n$, the homogeneous problem solved at the beginning is

$$(D^2 + b_iD + c_i)\bar{u}_{2n-2i}^h = 0 \quad \mathcal{T}_0(\bar{u}_{2n-2i}^h) = 1, \mathcal{T}_1(\bar{u}_{2n-2i}^h) = 0.$$

This is followed by the solution of (3.2) with $k = i + 1, \dots, n$. As before, $\bar{u}_0^h$ is the last solution to be found and $\bar{u}^h = \bar{u}_0^h$. On the other hand, if $h = m + 2i$ with $1 \leq i \leq n$, the homogeneous problem solved at the beginning is

$$(D^2 + b_iD + c_i)\bar{u}_{2n-2i}^h = 0 \quad \mathcal{T}_0(\bar{u}_{2n-2i}^h) = 0, \mathcal{T}_1(\bar{u}_{2n-2i}^h) = 1.$$

This is followed by the solution of (3.2) with $k = i + 1, \dots, n$. As before, $\bar{u}_0^h$ is the last solution to be found and $\bar{u}^h = \bar{u}_0^h$.

By using the methods of Section 2.1 repeatedly, we end up with a particular solution u^p and homogenous solutions $\bar{u}^1, \dots, \bar{u}^{m+2n}$. The solution of the boundary value problem $Lu = f$ is expressed as

$$u = u^p + \sum_{j=1}^{m+2n} C_j \bar{u}^j.$$

The constants C_j are found to fit the boundary conditions on u .

There are two ways to find C_j . In the first method, the particular solution u^p and the homogenous solutions $\bar{u}^h$ are obtained in physical space as numerical values at the $M+1$ points on the Chebyshev grid. Boundary conditions such as $u(1) = A$ or $u''(-1) = B$ are expressed using a linear combinations of function values at the grid point. A boundary condition such as $u(1) = A$ simply specifies the function value at a single grid point. A boundary condition such as $u''(-1)$ is interpreted as specifying that a certain linear combination of function values, the linear combination being determined by a single row of a spectral differentiation matrix [11], must have a specified value. This is the easier method for implementation and the one we have implemented. If the number M is not too large, this method will be adequate. If M is very large, then errors will creep in through the boundaries. In Section 7, we demonstrate that one can make do with small M even for computing solutions that develop very thin boundary layers or internal layers.

The second technique uses the intermediate objects created when the particular solution and the homogeneous solutions are found. We illustrate the technique using an example. Suppose the boundary value problem is

$$(D - a_1)(D - a_2)(D - a_3)(D - a_4)u = f$$

subject to $u(\pm 1) = u'(\pm 1) = 0$. If $u = u^p + \sum_{j=1}^4 C_j \bar{u}^j$, the conditions on $u(\pm 1)$ give two equations for the C_j after evaluation at ± 1 . We may rewrite the other boundary conditions as $(D - a_4)u = 0$ at ± 1 . If we now note that

$$(D - a_4)u = u_1^p + \sum_{j=1}^3 C_j \bar{u}_1^j$$

we get two more equations for the C_j by evaluating at ± 1 . In the sum above, the $j = 4$ term does not appear. That is because the homogeneous solution $\bar{u}^4$ satisfies $(D - a_4)\bar{u}^4 = 0$.

4 Errors in intermediate quantities and how they cancel

Greengard [4] has emphasized that when spectral integration is used to solve a linear boundary value problem, the number of grid points should be adequate to resolve the solution but, most importantly, need not resolve the Green's function. For example, the solution of the linear boundary value problem $(D^2 - a^2)u = -(\pi^2 + a^2) \sin \pi y$ with boundary conditions $u(\pm 1) = 0$ is $u = \sin \pi y$. The solution can be represented with machine precision on a Chebyshev grid that uses slightly more than 20 points. If $a = 10^6$ it will take a Chebyshev grid with around 10^4 points to resolve the Green's function. Spectral integration can solve this boundary value problem using a Chebyshev grid with 20 or 30 points even if $a = 10^6$. In this section, we explain the rather roundabout manner in which spectral integration comes to acquire this property.

If x is the solution of the matrix system $Ax = b_1 + b_2$ and x_1, x_2 are the solutions of $Ax_1 = b_1, Ax_2 = b_2$, then $x = x_1 + x_2$ if A is nonsingular. In machine arithmetic and in the presence of rounding errors, this linear superposition property will be true only approximately. This section deals with discretization errors and not rounding errors. Therefore we will assume this linear superposition property.

Suppose that $Lu = f$ is the given equation. With given boundary conditions on u , this equation is assumed to have a solution that is well-resolved using $M + 1$ Chebyshev points. In all forms of spectral integration, a particular solution satisfying $Lu^p = f$ is found using some other global conditions on u^p . Typically it will take many more points than M to resolve u^p . Thus the computed u^p will be inaccurate. However, the approximation to u obtained by combining u^p with the homogeneous solutions will retain its accuracy for reasons we will now explain. Before turning to the explanation, we mention that this situation, where a solution can be resolved more easily than the Green's function or a particular solution that satisfies integral conditions, occurs frequently in practice [6, 7, 15] and it is important for an implementation to have this property.

The explanation takes its simplest form for r -th order spectral integration described in Section 2.2 and it is with that method that we begin. Suppose L is a linear differential operator with constant coefficients and order r as in Section 2.2. We begin by denoting the *computed* solution of

$$Lu = LT_j$$

with integral conditions $\mathcal{T}_0(u) = \cdots = \mathcal{T}_{r-1}(u) = 0$ by U_j for $j = 0, \dots, r-1$. Thus the Chebyshev series of U_j is obtained by solving a banded system with $2r + 1$ diagonals and a right hand side that corresponds to the Chebyshev series of LT_j integrated r times. The U_j will be typically quite inaccurate. We will show that the U_j occur in the particular solution and the homogeneous solutions in such a way that they cancel when an approximation to the solution of $Lu = f$ with the given boundary conditions is computed.

Let u_E be the solution of $Lu_E = f$ which satisfies the given boundary conditions and is accurate to machine precision with a Chebyshev series of M terms. We rewrite u_E as

$$u_E = \frac{\alpha_0}{2} + \alpha_1 T_1 + \cdots + \alpha_{r-1} T_{r-1} + u_R$$

where $\mathcal{T}_j(u_R) = 0$ for $j < r$. We may rewrite f as

$$f = \frac{\alpha_0}{2} LT_0 + \cdots + \alpha_{r-1} LT_{r-1} + f_R$$

where $f_R = Lu_R$.

The particular solution of $Lu = f_R$ which is computed by r -th order spectral integration is $u^p = u_R$. This is because u_R satisfies the integral boundary conditions, the first r of its Chebyshev coefficients being zero, as well as $Lu = f_R$ and can be represented to machine precision using a Chebyshev series of M terms. By linear superposition, the particular solution of $Lu = f$ satisfying integral boundary conditions that is computed is given by

$$u^p = \frac{\alpha_0}{2} U_0 + \alpha_1 U_1 + \cdots + \alpha_{r-1} U_{r-1} + u_R. \quad (4.1)$$

Homogeneous solutions of $Lu = 0$ are computed such that $\mathcal{T}_j(u) = 1$ but with the other $r - 1$ Chebyshev coefficients among the first r coefficients being zero, for j in the list $0, \dots, r -$

1. This homogeneous solution is represented as $u = T_j + u^*$ and u^* is computed as the particular solution of $Lu^* = -LT_j$, whose first r coefficients are zero. Therefore the computed homogeneous solutions are

$$\bar{u}^1 = 1/2 - U_0/2, \quad \bar{u}^2 = T_1 - U_1, \quad \dots, \quad \bar{u}^r = T_{r-1} - U_{r-1}. \quad (4.2)$$

By observing (4.1) and (4.2), we recognize that

$$u_E = u^p + \frac{\alpha_0}{2}\bar{u}^1 + \alpha_1\bar{u}^2 + \dots + \alpha_{r-1}\bar{u}^r.$$

In this linear combination of the particular solution with the homogeneous solutions, the coefficients are such that the inaccurate U_j cancel exactly and the solution u_E satisfies the given boundary conditions. If the equations that are solved to determine the linear combination of homogeneous solutions with the particular solution are reasonably well-conditioned, which we may expect because these are typically very small linear systems, the computed solution will produce u_E very accurately.

The explanations for the factored form of spectral integration and the Zebib-Greengard version are more complicated. We will give the explanation for the problem $(D-a)(D-b)u = f$. The given boundary conditions are assumed to be $u(\pm 1) = 0$. We assume as before that u_E is the approximate solution whose Chebyshev series has M terms and which is accurate to machine precision.

Suppose U_2 is the solution of $(D-b)u = 0$ satisfying $\mathcal{T}_0(U_2) = 0$ computed as explained in Section 2.1 using a Chebyshev series with M terms. Similarly, let U'_1 be the computed solution of $(D-a)u = 0$, and let U_2 be the particular solution of $(D-b)u = U'_1$ satisfying $\mathcal{T}_0(U_2) = 0$ and computed using a Chebyshev series with M terms only. The factored form of spectral integration uses U_1 and U_2 as a basis of homogeneous solutions. For reasons given above, U_1 and U_2 are typically very inaccurate.

As before, we will split u_E but the split is more complicated this time. We write

$$u_E = \frac{\alpha_0}{2} + (\alpha_1 - \gamma)T_1 + u_R,$$

where γ is chosen such that

$$u_R = \gamma T_1 + \alpha_2 T_2 + \dots + \alpha_{M-1} T_{M-1}$$

satisfies $(D-b)u_R = 0$. By applying $(D-a)(D-b)$ to u_E , f can be split as

$$f = \frac{ab\alpha_0}{2} - (a+b)(\alpha_1 - \gamma) + ab(\alpha_1 - \gamma)T_1 + (D-a)(D-b)u_R.$$

The computed particular solution that corresponds to $(D-a)(D-b)u = ab\alpha_0/2 - (a+b)(\alpha_1 - \gamma)$ is $(ab\alpha_0/2 - (a+b)(\alpha_1 - \gamma))U_1$. The particular solution of

$$(D-a)(D-b)u = ab(\alpha_1 - \gamma)T_1 \quad (4.3)$$

is obtained by solving

$$\begin{aligned} (D-a)v &= ab(\alpha_1 - \gamma)T_1 = (D-a)(-b(\alpha_1 - \gamma)T_1) + b(\alpha_1 - \gamma) \\ (D-b)u &= v. \end{aligned}$$

Because of the way the right hand side of the $(D - a)v$ equation is rewritten, the particular solution of (4.3) may be taken to be computed as the particular solution of

$$(D - b)u = -b(\alpha_1 - \gamma)T_1 + b(\alpha_1 - \gamma)U_1' = (D - b)(\alpha_1 - \gamma)T_1 - (\alpha_1 - \gamma) + b(\alpha_1 - \gamma)U_1'.$$

From the form of the right hand side, we infer that the particular solution of (4.3) is computed to be

$$(\alpha_1 - \gamma)T_1 - (\alpha_1 - \gamma)U_2 + b(\alpha_1 - \gamma)U_1.$$

Because of the way f was split,

$$\begin{aligned} u^p &= (ab\alpha_0/2 - (a + b)(\alpha_1 - \gamma))U_1 + (\alpha_1 - \gamma)T_1 - (\alpha_1 - \gamma)U_2 + b(\alpha_1 - \gamma)U_1 + u_R \\ &= a(b\alpha_0/2 - \alpha_1 + \gamma)U_1 - (\alpha_1 - \gamma)U_2 + (\alpha_1 - \gamma)T_1 + u_R \end{aligned} \quad (4.4)$$

is the particular solution of $(D - a)(D - b)u = f$ computed by the factored form of spectral integration.

The homogeneous solutions computed by the factored form of spectral integration are

$$\begin{aligned} \bar{u}^1 &= \frac{aU_1}{2} + \frac{U_2}{2} \\ \bar{u}^2 &= \frac{1}{2} + \frac{bU_2}{2}. \end{aligned} \quad (4.5)$$

By observing (4.4) and (4.5), we find that

$$u_E = u^p - 2(b\alpha_0/2 - \alpha_1 + \gamma)\bar{u}^1 + \alpha_0\bar{u}^2.$$

We may argue as before that even though u^p , $\bar{u}^1$, $\bar{u}^2$ are inaccurate, the factored form of spectral integration solves $(D - a)(D - b)u = f$ with boundary conditions $u(\pm 1) = 0$ accurately.

5 Condition numbers and numerical accuracy

Spectral integration of r -th degree solves a banded matrix with $2r + 1$ diagonals. The same is true for the Greengard-Zebib version. In its factored form, the matrices solved by spectral integration have either 3 or 5 diagonals. In all these cases, the condition number of the matrix remains bounded as $M \rightarrow \infty$ [1, 4], $M + 1$ being the number points in the Chebyshev grid. The matrices discretize a compact integral operator such as (1.8). Therefore the condition number does not diverge as the number of grid points is increased.

A question of greater practical import is the limit the condition number converges to as $M \rightarrow \infty$. Numerical tests show that for an operator such as $(D^2 - a^2)$ the limit is approximately a^2 for large a (see the last columns of Tables 2 and 3 of [1]). For an operator such as $(D^2 - a^2)(D^2 - b^2)$ the limit appears to be a^2b^2 . If $a = 10^6$ and $b = 2 \times 10^6$, for example, the condition numbers will be greater than 10^{24} . Yet the boundary value problem $(D^2 - a^2)(D^2 - b^2)u = a^2b^2$, $u(\pm 1) = u'(\pm 1) = 0$, is solved with a loss of around 6 digits. The boundary layer has a thickness of approximately 10^{-6} and therefore a loss of around 6 digits is inevitable. The surprising fact is that all versions of spectral integration are much more accurate than the condition number suggests.

Figure 5.1 shows the singular values and vectors of a spectral integration matrix. It may be observed that the first few singular vectors (the right singular vectors are shown but plots

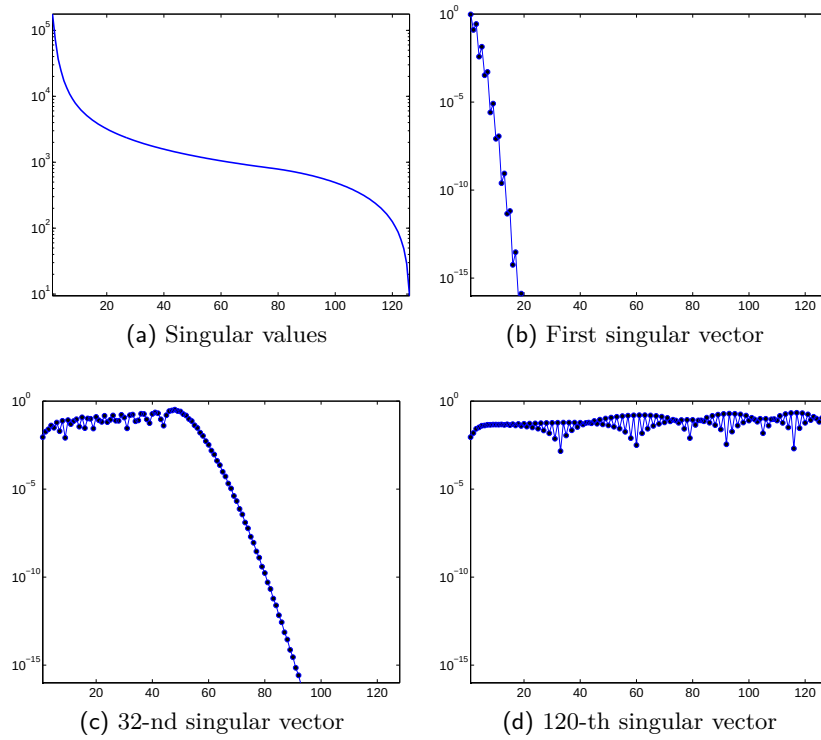


Fig. 5.1: Singular values and vectors of a spectral integration matrix corresponding to $D^2 + aD + b$ with $a = 10^5$, $b = -10^6$, and $M = 128$. The plots of the singular vectors show absolute value of the entry against its position in the vector.

a	M	error
1e+06	1024	0.497459
1e+06	4096	7.22283e-05
1e+06	8192	3.81267e-11
1e+06	16384	4.9402e-11
1e+06	65536	1.55942e-10

(a) $(D + a)u = a$ with $u(-1) = 0$.

a	M	error
1e+06	8	6.15934e-09
1e+06	16	4.5e-16
1e+06	32	4.11129e-16
1e+06	1024	5.98272e-14
1e+06	65536	2.3926e-12

(b) $(D + a)u = \pi \cos(\pi y) + a \sin(\pi y)$ with $u(-1) = 0$.

a	M	error
1e+06	1024	0.391632
1e+06	4096	9.28769e-05
1e+06	8192	4.81313e-11
1e+06	16384	4.63216e-11
1e+06	32768	4.25722e-11

(c) $(D^2 - aD)u = 0$ with $u(-1) = 1$ and $u(1) = 2$.

c	M	error
10000	8	4.21405e-06
10000	16	2.27521e-12
10000	32	7.44196e-15
10000	1024	2.60902e-14
10000	16384	2.74558e-13

(d) $(D^2 + c)u = (-\pi^2 + c) \sin \pi y$ with $u(\pm 1) = 0$.

a	b	M	error1	error2
1e+06	2e+06	1024	0.863351	0.863351
1e+06	2e+06	8192	2.14342e-07	2.14697e-07
1e+06	2e+06	16384	1.11927e-09	8.68444e-10
1e+06	2e+06	131072	2.62727e-08	3.47769e-08

(e) $(D^2 - a^2)(D^2 - b^2)u = a^2b^2$ with $u(\pm 1) = u'(\pm 1) = 0$.

Tab. 1: Errors in spectral integration. The version of spectral integration used is the factored form of Section 3. In (e), the two errors correspond to the factorizations $(D - a)(D + a)(D - b)(D + b)$ and $(D^2 - a^2)(D^2 - b^2)$, respectively.

of the left singular vectors look similar) are localized with most of their energy in the first few entries. In all versions of spectral integration, the right hand side vector has entries whose magnitudes decrease rapidly after the first few entries. Therefore the localization of singular vectors may be the reason solutions which develop boundary layers are much more accurate than the condition numbers of linear systems that occur in spectral integration suggest.

6 Numerical examples

Spectral integration can solve linear boundary value problems using no more than the number of grid points sufficient for resolving the solution. For reasons explained in Section 4, it is not necessary for the grid to resolve the Green's function of the linear boundary value problem. However, if the grid over-resolves the solution, spectral integration remains accurate. In higher order problems whose solutions develop thin boundary layers, spectral integration is far more accurate than indicated by the condition numbers of matrices that are solved. This could be because of the phenomenon of localization of singular vectors discussed in the previous section.

Table 1 applies the version of spectral integration derived in Section 3 to some examples and demonstrates these properties.

Example (a) of Table 1 develops a thin boundary layer at $y = -1$. The boundary layer thickness is approximately 10^{-6} . Within this thin boundary layer, the solution transitions from a value approximately equal to 1 in the interior of the domain to the value of 0 at $y = -1$. The table shows that the solution is well resolved with $M = 8192$, where $M + 1$ is the number of points in the Chebyshev grid. If the grid were uniformly spaced, it would take about a million points before the grid saw the boundary layer. Thanks to quadratic clustering of Chebyshev points near the end points ± 1 , far fewer points are used. If the boundary layer is as thin as 10^{-6} , any numerical method will lose about 6 digits of accuracy. The boundary layer will look like $1 - e^{-a(y+1)}$ near $y \approx -1$. The mere evaluation of $1 - e^{-a(y+1)}$ near $y = -1$ will lose about 6 digits if $a = 10^6$. Thus the errors in Table 1a are the best possible in double precision arithmetic. All errors reported here are in the L^∞ or sup norm.

Example (b) of Table 1 uses the same operator as example (a). However, the right hand side is chosen such that the solution is $\sin \pi y$. We find that the solution is computed with accuracy comparable to machine precision with $M = 16$. Thus the grid is required to resolve the solution but need not resolve the Green's function. The reason spectral integration has this important property is discussed thoroughly in Section 4. Examples (a) and (b) as well as all the other examples demonstrate the robustness of spectral integration when the grid over-resolves the solution. In practice, this property of spectral integration is not as important as the others.

Example (c) is taken from [5]. In the next section, Table 1(c) will be compared to spectral integration using a piecewise Chebyshev grid. We will find that the piecewise Chebyshev grid has dramatic advantages.

Example (d) demonstrates that even when the Green's function has rapid oscillations, the grid has to resolve the solution but not the Green's function.

Example (e) treats a fourth order boundary value problem. The two errors reported in Table 1e correspond to the factorizations $(D - a)(D + a)(D - b)(D + b)$ and $(D^2 - a^2)(D^2 - b^2)$, either of which can be used with the method of Section 3. There is no significant difference in errors between the two factorizations.

Table 2 compares a Chebfun implementation of spectral integration with C++. The Chebfun system supports functions as first class objects in MATLAB [14]. The Zebib-Greengard version of spectral integration has been implemented in MATLAB using *chebfuns* [2]. The Chebfun implementation does not use Chebyshev series as in Sections 2 and 3 but works in physical space using integration matrices that are presumably based on the Clenshaw-Curtis rule. The Chebfun implementation was unable to solve the examples (c) and (e) of Table 1. It detects that the matrices are ill-conditioned and aborts the calculation. The first two rows of Table 2 show that the Chebfun errors are noticeably greater than the C++ errors. It appears that the partial immunity to ill-conditioning of matrices enjoyed by the methods of Sections 2 and 3 is not possessed by the Chebfun implementation. That is probably because the singular vectors are localized when the matrices solve for Chebyshev coefficients, as we illustrated in Section 5, but are not localized in physical space.

The last row of Table 2 shows that C++ is 15,000 or 60,000 times faster than the Chebfun implementation. Before we interpret those numbers, we point out that Chebfun is a general purpose system than can solve a wide variety of problems. It is not designed to be fast.

Problem	Chebfun	C++
$(D^2 - aD)u = 0$ with $u(-1) = 1$, $u(1) = 2$, and $a = 10^4$.	Error of 2.68×10^{-8} with $M = 744$.	Error of 2.47×10^{-13} with $M = 744$.
$(D^2 + 5D + 10^4)u = -500 \cos(100y)e^{-5y}$ with $u(0) = 0$ and $u(1) = \sin(100)e^{-5}$.	Error of 1.71×10^{-11} with $M = 99$.	Error of 1.50×10^{-14} with $M = 100$.
$(D^2 - a^2)(D^2 - b^2)u = f$ with f and the boundary conditions chosen such that $u = \sin \pi y$. The parameters a and b are $\mathcal{O}(1)$.	1.5523 billion cycles for a single solve on a single core of 2.67 GHz Xeon 5650.	108,600 or 25,900 cycles for a single solve on a single core of 2.67 GHz Xeon 5650.

Tab. 2: Comparison of Driscoll’s Chebfun/MATLAB implementation of spectral integration with a C++ implementation of the method in Section 3.

Nevertheless, discussion of why the speed-up in C++ is so large is pertinent because credible information about the speed of MATLAB with respect to C++ is so hard to find and the folklore beliefs on this topic are spurious.

Programs written in C++ cannot be benchmarked perfectly. The execution time of the same instruction sequence depends upon contextual and architectural factors such as cache misses, the load on internal buffers used by the memory controller, the load on reservation stations used for register renaming, the efficacy of DRAM optimizations, and other factors. The manner in which reliable timing numbers can be obtained is discussed briefly in [11]. Reasonable precautions have been taken to ensure the validity of numbers reported in Table 2.

In [11], we compared carefully optimized C++ programs with MATLAB and found C++ to be a few thousand times faster. The comparison given in Table 2 is perhaps more realistic. The C++ program was written in the ordinary way, with no effort to optimize by unrolling loops and inspecting the assembly code as in [11], although we used good libraries following our usual practice. We did not decouple even and odd modes, an optimization that the problem in row three of Table 2 permits. The MATLAB program, which was kindly supplied to us by Driscoll [2], is expertly coded using an idiom that is native to that system.

We now return to the C++ speed-up factors relative to Chebfun/MATLAB, which are implied to be 15,000 and 60,000 by Table 2. The speed-up of 60,000 comes about if the differential operator is fixed but the right hand side is varied. Our C++ program is written to be optimal in that situation. However, in Chebfun/MATLAB each solution of the boundary value problem builds the matrices from scratch. The speed-up factor of 15,000 was obtained when we did the same. Specifically, the parameters in the differential operator were varied randomly from one use to the next which meant that matrices needed to be set up anew and factored for each usage.

The Chebfun/MATLAB algorithm is different from the algorithm implemented in C++. In particular, Chebfun tries to solve a harder problem by attempting to figure out the right

number of grid points to resolve the solution on the fly. That information is supplied to the C++ program explicitly. In [10], it is reported that Chebfun computes a representation of $(.01 + (x - 0.3)^2)^{-1}$ in 0.1 seconds on a desktop. We take that to be about 0.25 billion cycles. The number of cycles expended by Chebfun to determine the collocation points automatically for the test problem in row 3 of Table 2 is certainly smaller than 0.25 billion cycles. The right hand side in the test problem is of the form $A + B \sin \pi y + C \cos \pi y$ and the solution is $\sin \pi y$, both of which are easy to resolve. Chebfun's ability to collocate automatically is not a significant influence on the observed speed-up.

The resolution used by Chebfun in the third row of Table 2 was $M = 22$. We used $M = 32$ in C++. Chebfun used dense matrices while our C++ program uses the discrete cosine transform (DCT) and banded matrices. The real-to-real DCT has a substantial constant factor for $M = 32$, and our opinion is that this difference accounts for a speed-up factor of at most 10. We also mention that using banded matrices and the DCT is not native to MATLAB's idiom. While such optimizations are natural in C++, their use would make MATLAB programming cumbersome and error prone.

Thus we are led to the conclusion that the performance penalty incurred by the use of MATLAB is a factor of a few thousand or more. A similar performance penalty was observed in [11]. This performance penalty is likely to increase in the next few years and we expect it to be much greater for parallel programs. Progress in computer architecture has far out-paced progress in software. A C++ program written without awareness of computer architecture had a much better chance of approaching optimality twenty years ago than it does today. The import of this trend can be observed within MATLAB itself. In [11], we reported that a MATLAB function for computing Lagrange weights was six times faster when written with explicit loops, in a style that is natural to C or C++ but not to MATLAB, instead of vectorization, which is the idiom native to MATLAB. Presumably MATLAB uses some kind of a byte code interpreter and explicit loops convert to better byte code than vectorized statements.

7 Piecewise Chebyshev grids

Section 7.1 generalizes spectral integration to piecewise Chebyshev grids. The interval of the boundary value problem, which we usually take to be $[-1, 1]$, is split into sub-intervals and each sub-interval is discretized using scaled and shifted Chebyshev points. We find that a problem that requires $M = 8192$ if the entire interval is discretized using Chebyshev points can be solved with the same level of accuracy using three intervals and $M_1 = M_2 = M_3 = 32$.

If M is as small as 32, differentiation matrices are as accurate as spectral integration. They are much simpler to implement although they use more memory and more arithmetic operations. In Section 7.2, we show that boundary layers and internal layers can be computed accurately using differentiation matrices and piecewise Chebyshev grids.

7.1 Spectral integration and piecewise Chebyshev grids

To generalize spectral integration to piecewise Chebyshev grids, we consider the operator $(D - a)(D - b)$ over the interval $-1 \leq y \leq 1$ and the boundary value problem $(D - a)(D - b)f = u$. As in Sections 2 and 3, the boundary conditions enter only at the end and much of the method is independent of the specific form of the boundary conditions. The generalization to operators of the form $(D - a_1) \dots (D - a_m)$ will be obvious.

Let $[-1, 1] = \mathcal{I}_1 \cup \dots \cup \mathcal{I}_n$, where $\mathcal{I}_i$ are intervals with disjoint interiors and with the right end point of $\mathcal{I}_i$ equal to the left end point of $\mathcal{I}_{i+1}$. Thus $\mathcal{I}_1, \dots, \mathcal{I}_n$ are disjoint intervals arranged in order. Let w_i denote the width of the interval $\mathcal{I}_i$.

We use a linear change of variables $\mathcal{I}_i \rightarrow [-1, 1]$ and rewrite the given differential equation as

$$\left(D - \frac{aw_i}{2}\right) \left(D - \frac{bw_i}{2}\right) u = \frac{w_i^2}{2} f \quad (7.1)$$

after the change of variables. In (7.1) it is assumed that u and f have been shifted from $\mathcal{I}_i$ to $[-1, 1]$ although that is not indicated explicitly by the notation.

We define u_i as

$$u_i = u^p + \alpha_{\mathcal{I}_i} \bar{u}^1 + \beta_{\mathcal{I}_i} \bar{u}^2, \quad (7.2)$$

where u^p is the particular solution and $\bar{u}^1, \bar{u}^2$ are the homogeneous solutions of (7.1), computed as described in Section 3.

For $i = 1, \dots, n$, the coefficients $\alpha_{\mathcal{I}_i}$ and $\beta_{\mathcal{I}_i}$ comprise $2n$ unknown variables in total. We will solve for these unknowns using the two boundary conditions and continuity conditions between intervals. The boundary conditions give two equations such as

$$\begin{aligned} u_1(-1) &= \text{left value} \\ u_n(1) &= \text{right value.} \end{aligned}$$

For $i = 1, \dots, n-1$, the continuity conditions are

$$\frac{u_i(1) = u_{i+1}(-1)}{\frac{((D - w_i b/2)u_i)(1)}{w_i}} = \frac{((D - w_{i+1} b/2)u_{i+1})(-1)}{w_{i+1}}.$$

The second continuity condition requires the derivatives to be continuous while accounting for the shifting and scaling of intervals of width w_i and w_{i+1} to $[-1, 1]$. The function $(D - w_i b/2)u_i$ is available through the intermediate quantities generated by the method of Section 3. In particular, we have,

$$(D - w_i b/2)u^p = u_1^p, \quad (D - w_i b/2)\bar{u}^1 = \bar{u}_1^1, \quad (D - w_i b/2)\bar{u}^2 = 0$$


in interval $\mathcal{I}_i$. Once we solve for $\alpha_{\mathcal{I}_i}$ and $\beta_{\mathcal{I}_i}$ for $i = 1, \dots, n$, we may use (7.2) to form u_i . The solution u is obtained by shifting the u_i from $[-1, 1]$ back to $\mathcal{I}_i$.

Table 3 summarizes spectral integration of piecewise Chebyshev grids applied to solve $(D^2 - aD)u = 0$ with $u(-1) = 1$, $u(1) = 2$, and $a = 10^6$. The boundary layer of this problem was displayed in Figure 1.1. It is evident from the table, that the intervals must be chosen carefully. We were unable to get an accurate solution with fewer than a thousand grid points and just a single interval properly contained in the boundary layer. The last row of Table 3 reports a solution with $M_1 = M_2 = M_3 = 32$ and an error of 4.7×10^{-11} . In that computation, two intervals are contained inside the boundary layer. In Table 1c we found that a single Chebyshev grid required $M = 8192$ to reach more than ten digits of accuracy.


The example of Table 3 coincides with Example 3 of [5]. Table 7 of that important paper reports an error of 2.33×10^{-11} using 15 intervals and $M = 16$ for each interval (the total number of grid points is 321). As discussed in the introduction, the method of [5] can handle

M1	M2	M3	node2	node3	error1	error2
16	1024	32	0.5	0.99999	5.80845e-06	1.701397e-02
16	4096	32	0.5	0.99999	4.07361e-11	2.825425e-10
32	128	32	0.999	0.99999	4.49718e-11	9.037897e-10
32	64	32	0.9999	0.99999	4.33247e-11	1.349214e-10
32	32	32	0.99995	0.99999	4.66069e-11	8.507683e-11

Tab. 3: Solution of $D^2 - aD = 0$ with $u(-1) = 1$, $u(1) = 2$, and $a = 10^6$ using a grid with three intervals, which are discretized using $M1 + 1$, $M2 + 1$, and $M3 + 1$ Chebyshev points, respectively. Nodes 1 and 4 are located at ± 1 . Errors 1 and 2 correspond to spectral integration and the use of differentiation matrices, respectively.



(a)

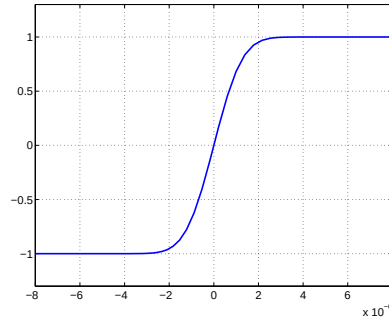

(b)

Fig. 7.1: Solution of $u'' + ayu' = 0$ with $u(-1) = -1$, $u(1) = 1$, and $a = 10^{12}$ using differentiation matrices and a piecewise Chebyshev grid. (a): Spy plot of matrix with $M1, M2, M3, M4, M5 = 4, 6, 8, 10, 12$. (b): Transition region of the solution.

non-constant coefficients but is significantly more expensive than spectral integration when the coefficients are constant.

Shiskin meshes [8] and finite element discretizations can be used to resolve boundary layers. For example, the boundary value problem $-\epsilon^2 u'' + u = y$ with boundary conditions $u(\pm 1) = 0$ and $\epsilon = 10^{-4}$ has been solved using a Shiskin mesh by Zhang [17]. An error of 2.8×10^{-6} was realized using 1024 degrees of freedom and linear elements. An error of 3.14×10^{-9} was realized using 512 degrees of freedom and quadratic elements. The thickness of the boundary layers is approximately ϵ or 10^{-4} for this example. Shiskin meshes approximately locate the transition points from the internal region to the boundary layer and make the mesh finer and finer as the boundary is approached. An apriori bound on L^∞ error at some but not all of the grid points has been obtained [8, 18].

7.2 Differentiation matrices and piecewise Chebyshev grids

The final item is the use of piecewise Chebyshev grids and spectral differentiation matrices. The ease with which a variety of problems can be solved using spectral differentiation matrices is illustrated in [13]. An efficient and stable method for computing spectral differentiation matrices is given in [11]. Spectral differentiation matrices become impractical and highly inaccurate in the presence of boundary layers or internal layers. However, if piecewise Chebyshev grids are used the number of grid points on each sub-interval can be kept small and the use of spectral differentiation matrices becomes possible. We illustrate using two examples.

The first example is the same as in Table 3, namely, $(D^2 - aD)u = 0$ with $u(-1) = 1$, $u(1) = 2$, and $a = 10^6$. We again use three intervals $\mathcal{I}_1 = [-1, \eta_2]$, $\mathcal{I}_2 = [\eta_2, \eta_3]$, and $\mathcal{I}_3 = [\eta_3, 1]$. Each interval is discretized by scaling and shifting the Chebyshev points. We assume the number of Chebyshev points in the intervals to be $M_1 + 1$, $M_2 + 1$, and $M_3 + 1$, respectively. Since the boundary conditions specify u at the end points, and u must be continuous at η_2 , η_3 , the total number of unknowns is $M_1 + M_2 + M_3 - 1$. We denote the vector of values of the function u at grid points by U . Its entries are the unknown values of u at interior grid points and the two known values at $y = \pm 1$.

Denote the differentiation matrix over the interval $\mathcal{I}_i$ by $\mathcal{D}_i$ and the matrix corresponding to $(D^2 - aD)$ by $\mathcal{L}_i$. Both $\mathcal{D}_i$ and $\mathcal{L}_i$ are matrices of dimension $(M_i + 1) \times (M_i + 1)$.

Over $\mathcal{I}_1$, the given equation can be written as $\mathcal{L}_1 U_{\mathcal{I}_1} = 0$, where $U_{\mathcal{I}_1}$ is a subvector of U corresponding to the $M_1 + 1$ grid points in $\mathcal{I}_1$. Only M_1 of the entries of $U_{\mathcal{I}_1}$ are unknown because the value of u at -1 , which is the left end point of $\mathcal{I}_1$, is known to be 1. We enforce this equation at $M_1 - 1$ interior points of $\mathcal{I}_1$ only. In particular, of the $M + 1$ equations $\mathcal{L}_1 U_{\mathcal{I}_1}$ the first and last are dropped. This gives us $M_1 - 1$ equations.

Similarly, the equations $\mathcal{L}_2 U_{\mathcal{I}_2} = 0$ and $\mathcal{L}_3 U_{\mathcal{I}_3} = 0$ are enforced at the $M_2 - 1$ and $M_3 - 1$ interior points of $\mathcal{I}_1$ and $\mathcal{I}_2$ only. In the case of $\mathcal{L}_3 U_{\mathcal{I}_3} = 0$ we must take note of the fact that the value of u at 1, which is the right end point of $\mathcal{I}_3$ is already known.

In this way, we get $M_1 + M_2 + M_3 - 3$ equations for $M_1 + M_2 + M_3 - 1$ unknowns. One more equation is obtained by setting the entries of $\mathcal{D}_1 U_{\mathcal{I}_1}$ and $\mathcal{D}_2 U_{\mathcal{I}_2}$ that correspond to the derivative at η_2 equal to each other. Yet another equation is obtained by matching the derivatives at η_3 .

Table 3 shows that solutions obtained using differentiation matrices and a piecewise grid are as accurate as the solutions from spectral integration.

The second example we consider is $\epsilon u'' + yu' = 0$ with boundary conditions $u(\pm 1) = \pm 1$ and $\epsilon = 10^{-12}$. The exact solution of this boundary value problem is given by

$$u(y) = -1 + \frac{2 \int_{-1/\sqrt{2\epsilon}}^{y/\sqrt{2\epsilon}} e^{-t^2} dt}{\int_{-1/\sqrt{2\epsilon}}^{1/\sqrt{2\epsilon}} e^{-t^2} dt}.$$

The solution has an internal layer at $y = 0$ of width approximately $\epsilon^{-1/2}$ or 10^{-6} . In Figure 7.1, we show the spy plot of a matrix corresponding to division of $[-1, 1]$ into five sub-intervals as well as the transition region of the solution.

This second example occurs near the end of [1], where it is reported that mapped Chebyshev points with $M = 1024$ compute the solution with an overshoot of 3×10^{-4} . From Table 4, we see that the overshoot is reduced to the order of machine precision using only 161 grid points. The overshoot is seen to be highly sensitive to the location of the nodes. The solution plotted

m	node4	overshoot
32	$5\sqrt{\epsilon}$	3.7e-15
32	$3\sqrt{\epsilon}$	1.2e-08
32	$7\sqrt{\epsilon}$	8.6e-09
24	$5\sqrt{\epsilon}$	1.8e-08

Tab. 4: Solution of $\epsilon u'' + y u' = 0$ with $u(-1) = -1$, $u(1) = 1$, and $\epsilon = 10^{-12}$ is shown in Table 7.1. This table gives the overshoot beyond $[-1, 1]$ of the solution computed using 6 nodes and 5 intervals. Nodes 1, 2, 3, 5, and 6 are fixed at -1 , $-8\epsilon^{1/2}$, $-3\epsilon^{1/2}$, $8\epsilon^{1/2}$, and 1, respectively. The number of Chebyshev points in each interval is $m + 1$.

in Figure 7.1b corresponds to the top row of the table. The solution appears to have around 10 digits of accuracy. The sensitivity to the placement of nodes can probably be reduced using Green's functions, which is the approach advocated in [5] and [15].

To summarize, this paper has introduced new formulations of spectral integration that are particularly convenient for higher order problems. We have illustrated the partial immunity of spectral integration to ill-conditioning of linear systems that are solved. We have clarified the manner in which spectral integration produces an accurate final answer even when the intermediate quantities are inaccurate. Finally, we have illustrated the efficacy of piecewise Chebyshev grids for resolving boundary layers and internal layers.

8 Acknowledgments

Thanks to Toby Driscoll for sending me his MATLAB code. This research was partially supported by NSF grants DMS-0715510, DMS-1115277, and SCREMS-1026317.

References

- [1] E.A. Coutsias, T. Hagstrom, and D. Torres. An efficient spectral method for ordinary differential equations with rational function coefficients. *Mathematics of Computation*, 65(214):611–636, 1996.
- [2] T.A. Driscoll. Automatic spectral collocation for integral, integro-differential, and integrally reformulated differential equations. *Journal of Computational Physics*, 229(17):5980–5998, 2010.
- [3] D. Gottlieb and S.A. Orszag. *Numerical Analysis of Spectral Methods: Theory and Applications*. Society for Industrial and Applied Mathematics, 1977.
- [4] L. Greengard. Spectral integration and two-point boundary value problems. *SIAM Journal on Numerical Analysis*, 28:1071–1080, 1991.
- [5] L. Greengard and V. Rokhlin. On the numerical solution of two-point boundary value problems. *Communications on Pure and Applied Mathematics*, 44(4):419–452, 1991.

-
- [6] J. Kim, P. Moin, and R. Moser. Turbulence statistics in fully developed channel flow at low Reynolds number. *Journal of Fluid Mechanics*, 177(1):133–166, 1987.
 - [7] L. Kleiser and U. Schumann. Treatment of incompressibility and boundary conditions in 3-d numerical spectral simulations of plane channel flows. In *3rd Conference on Numerical Methods in Fluid Mechanics*, pages 165–173, 1980.
 - [8] J.J.H. Miller, E. O’Riordan, and G.I. Shishkin. *Fitted numerical methods for singular perturbation problems: Error estimates in the maximum norm for linear problems in one and two dimensions*, volume 350. World Scientific Singapore, 1996.
 - [9] B. K. Muite. A numerical comparison of Chebyshev methods for solving fourth order semilinear initial boundary value problems. *J. Comput. Appl. Math.*, 234(2):317–342, 2010.
 - [10] R. Pachón, R.B. Platte, and L.N. Trefethen. Piecewise-smooth chebfuns. *IMA Journal of Numerical Analysis*, 30(4):898–916, 2010.
 - [11] B. Sadiq and D. Viswanath. Finite difference weights, spectral differentiation, and superconvergence. *arxiv.org*, 2010. Latest version on author’s web site.
 - [12] P. Starr and V. Rokhlin. On the numerical solution of two-point boundary value problems II. *Communications on Pure and Applied Mathematics*, 47(8):1117–1159, 1994.
 - [13] L.N. Trefethen. *Spectral methods in MATLAB*. Society for Industrial and Applied Mathematics, 2000.
 - [14] L.N. Trefethen. Computing numerically with functions instead of numbers. *Mathematics in Computer Science*, 1(1):9–19, 2007.
 - [15] D. Viswanath and I. Tobasco. Navier-stokes solver using Green’s functions I: channel flow and plane Couette flow. *arxiv.org*, 2012.
 - [16] A. Zebib. A Chebyshev method for the solution of boundary value problems. *Journal of Computational Physics*, 53(3):443–455, 1984.
 - [17] Z. Zhang. Finite element superconvergence approximation for one-dimensional singularly perturbed problems. *Numerical Methods for Partial Differential Equations*, 18(3):374–395, 2002.
 - [18] Z. Zhang. Finite element superconvergence on Shishkin mesh for 2-d convection-diffusion problems. *Mathematics of Computation*, 72(243):1147–1178, 2003.